



Fig 7

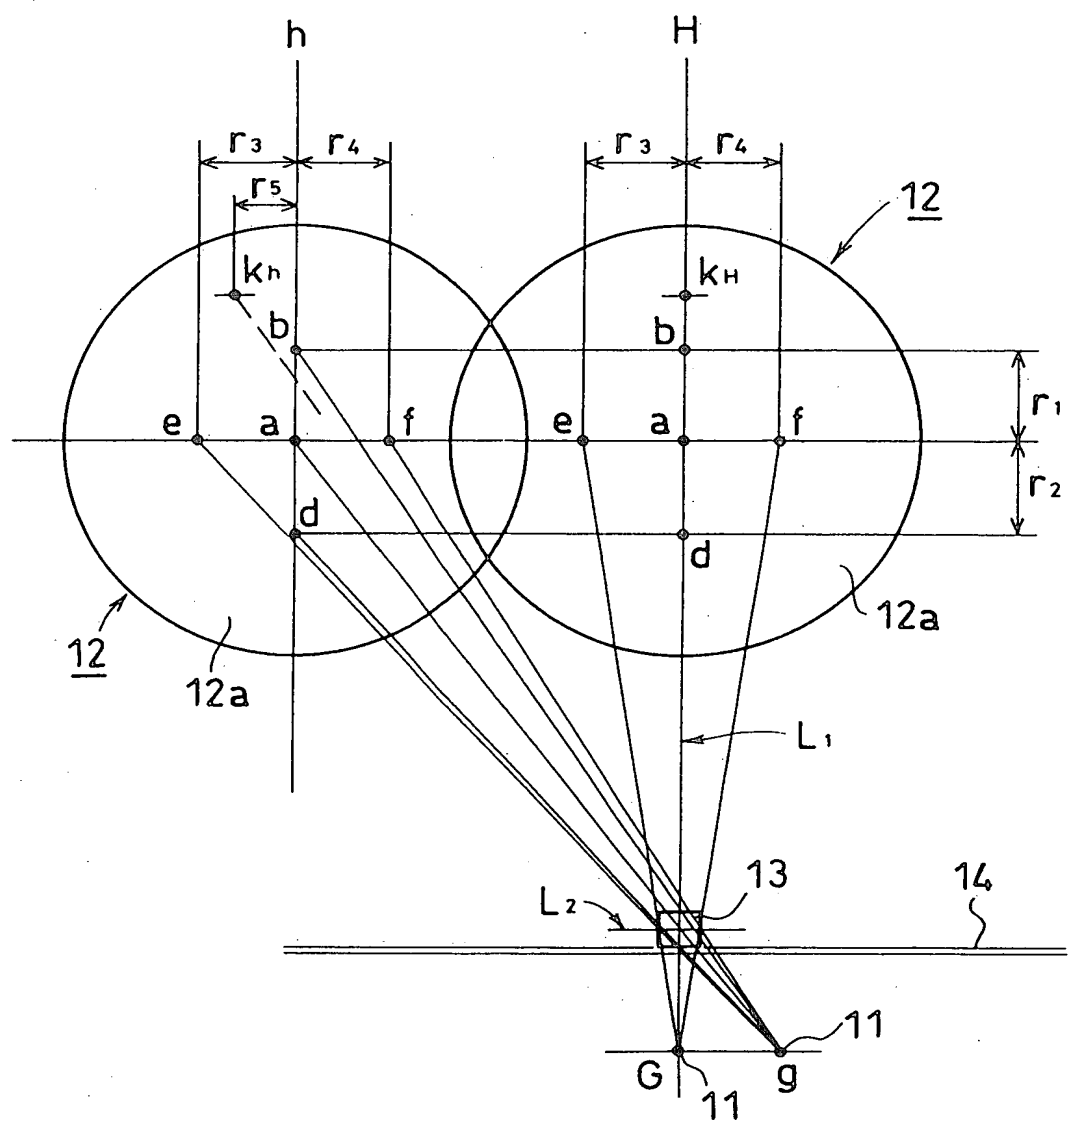


004360" 0/2660

Fig 8

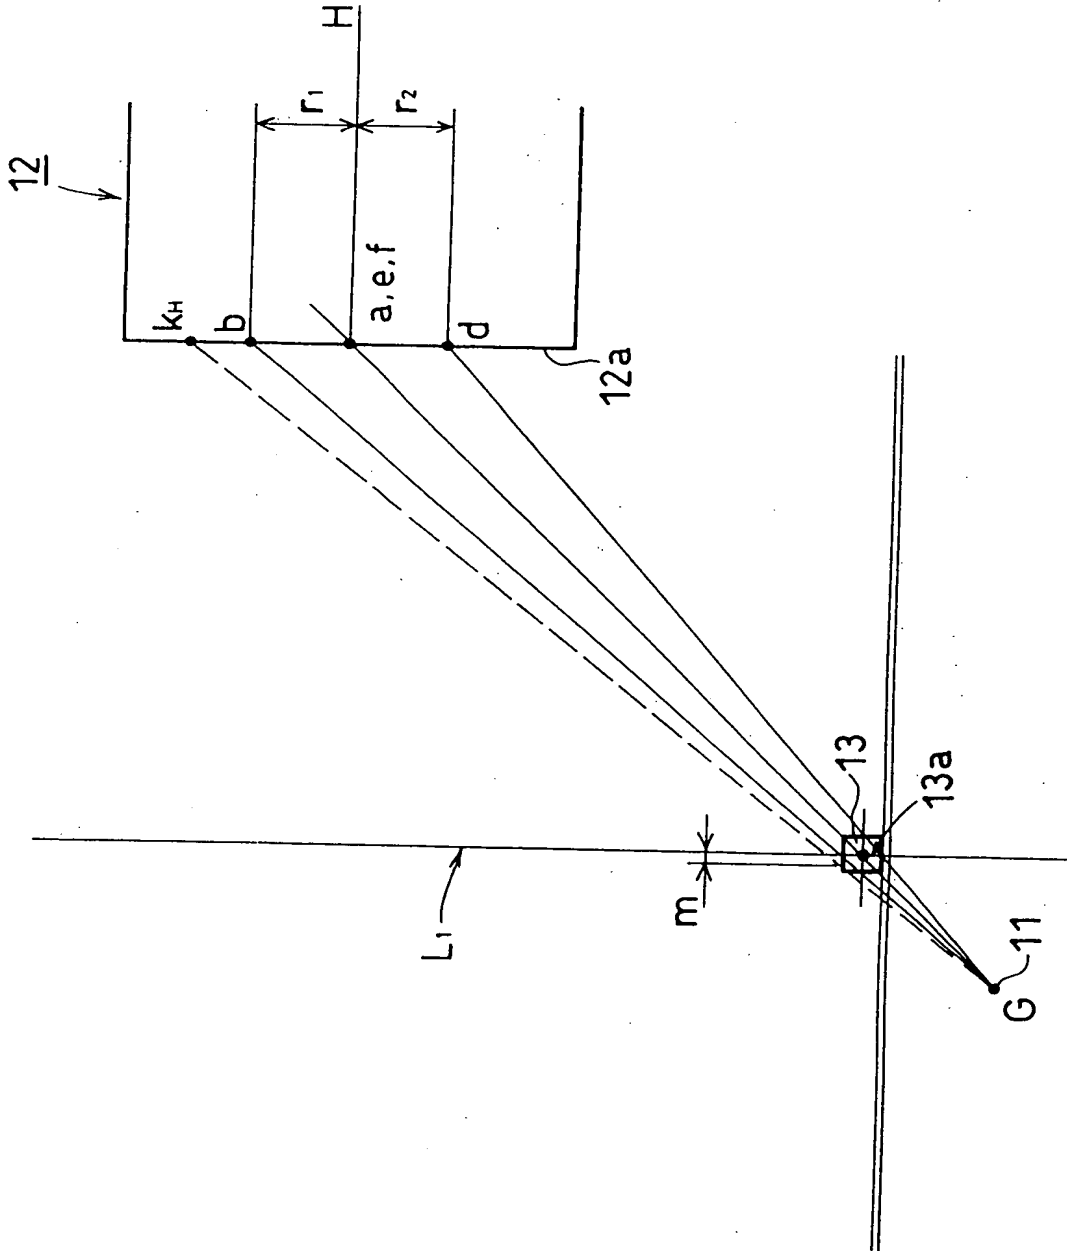


APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Fig 10

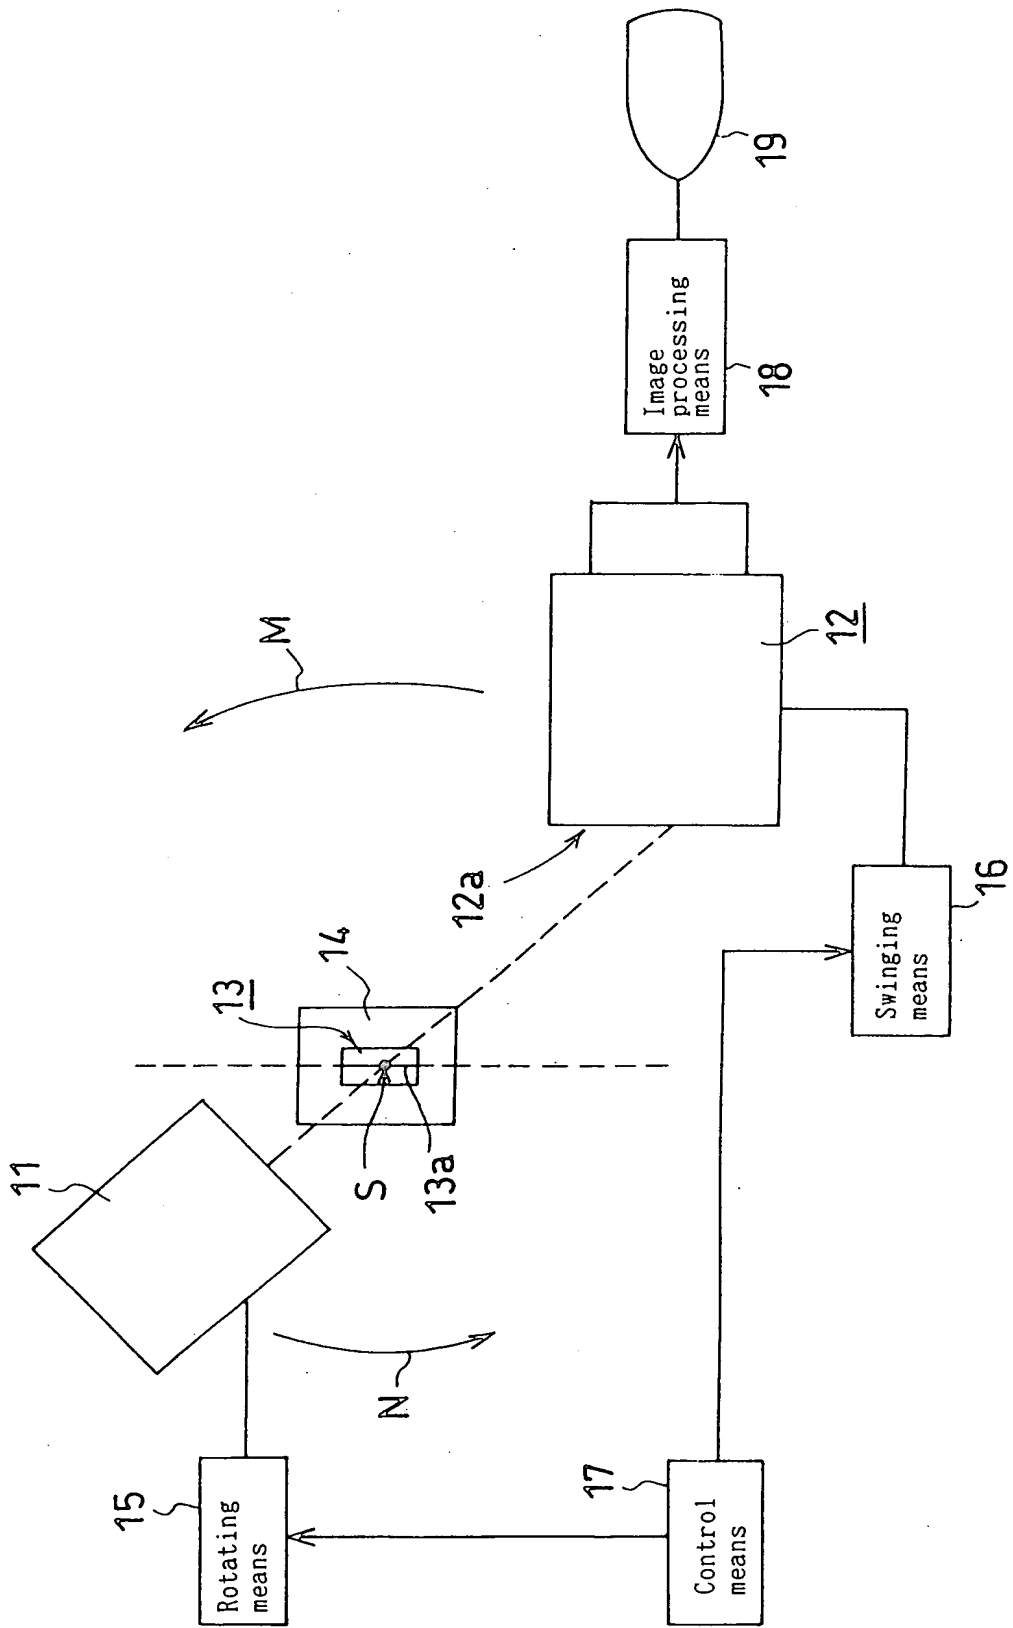


APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Fig 11

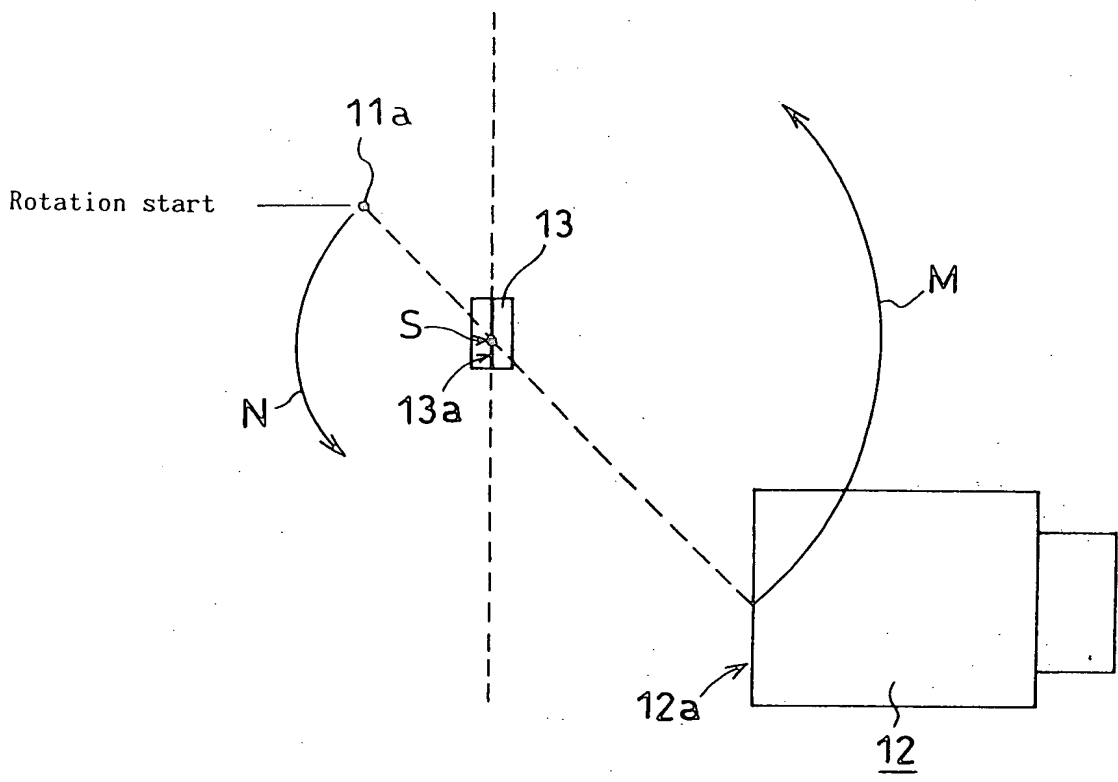

APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	


Fig 12

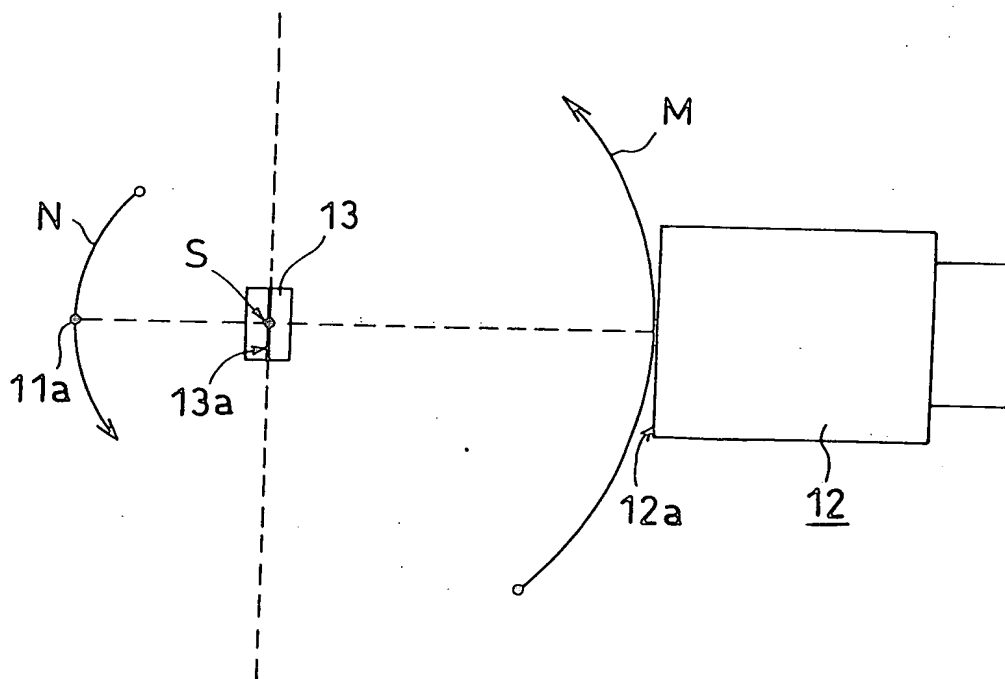

004260" S.F. 2550

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Fig 13

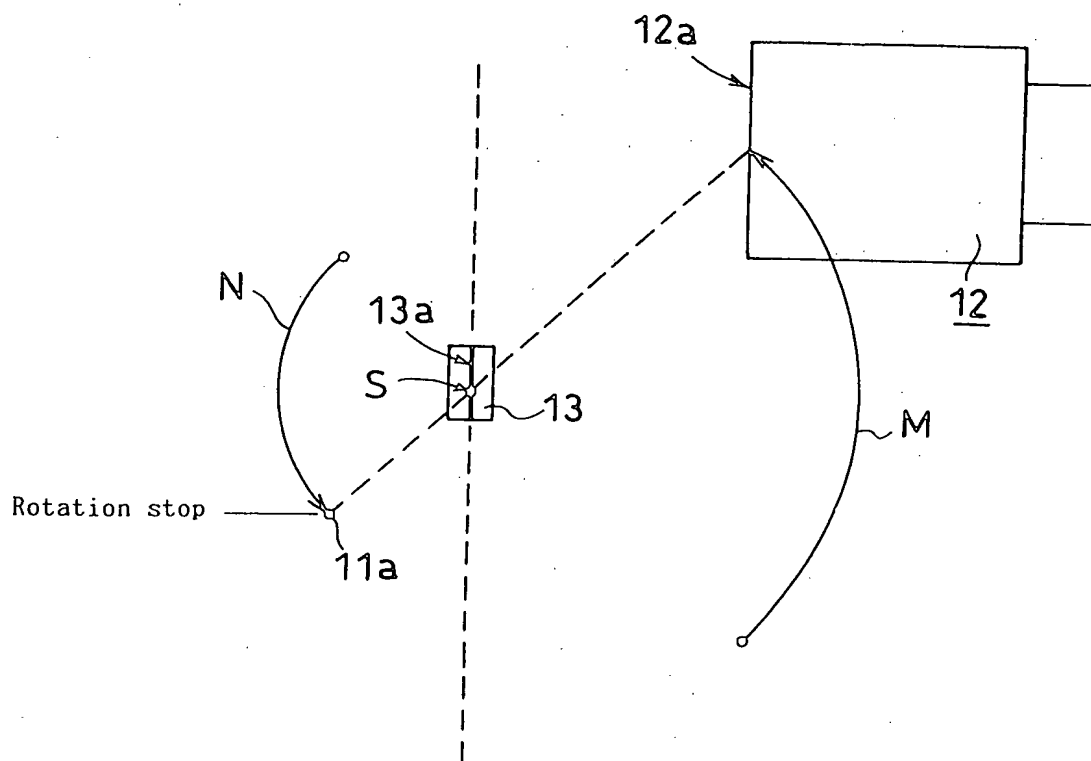


APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		




Fig. 14 is a perspective view of the device of Fig. 13, showing the device in a closed position. The device is shown in a perspective view, and the dimensions are given in inches. The device is shown in a perspective view, and the dimensions are given in inches. The device is shown in a perspective view, and the dimensions are given in inches.

Fig 14

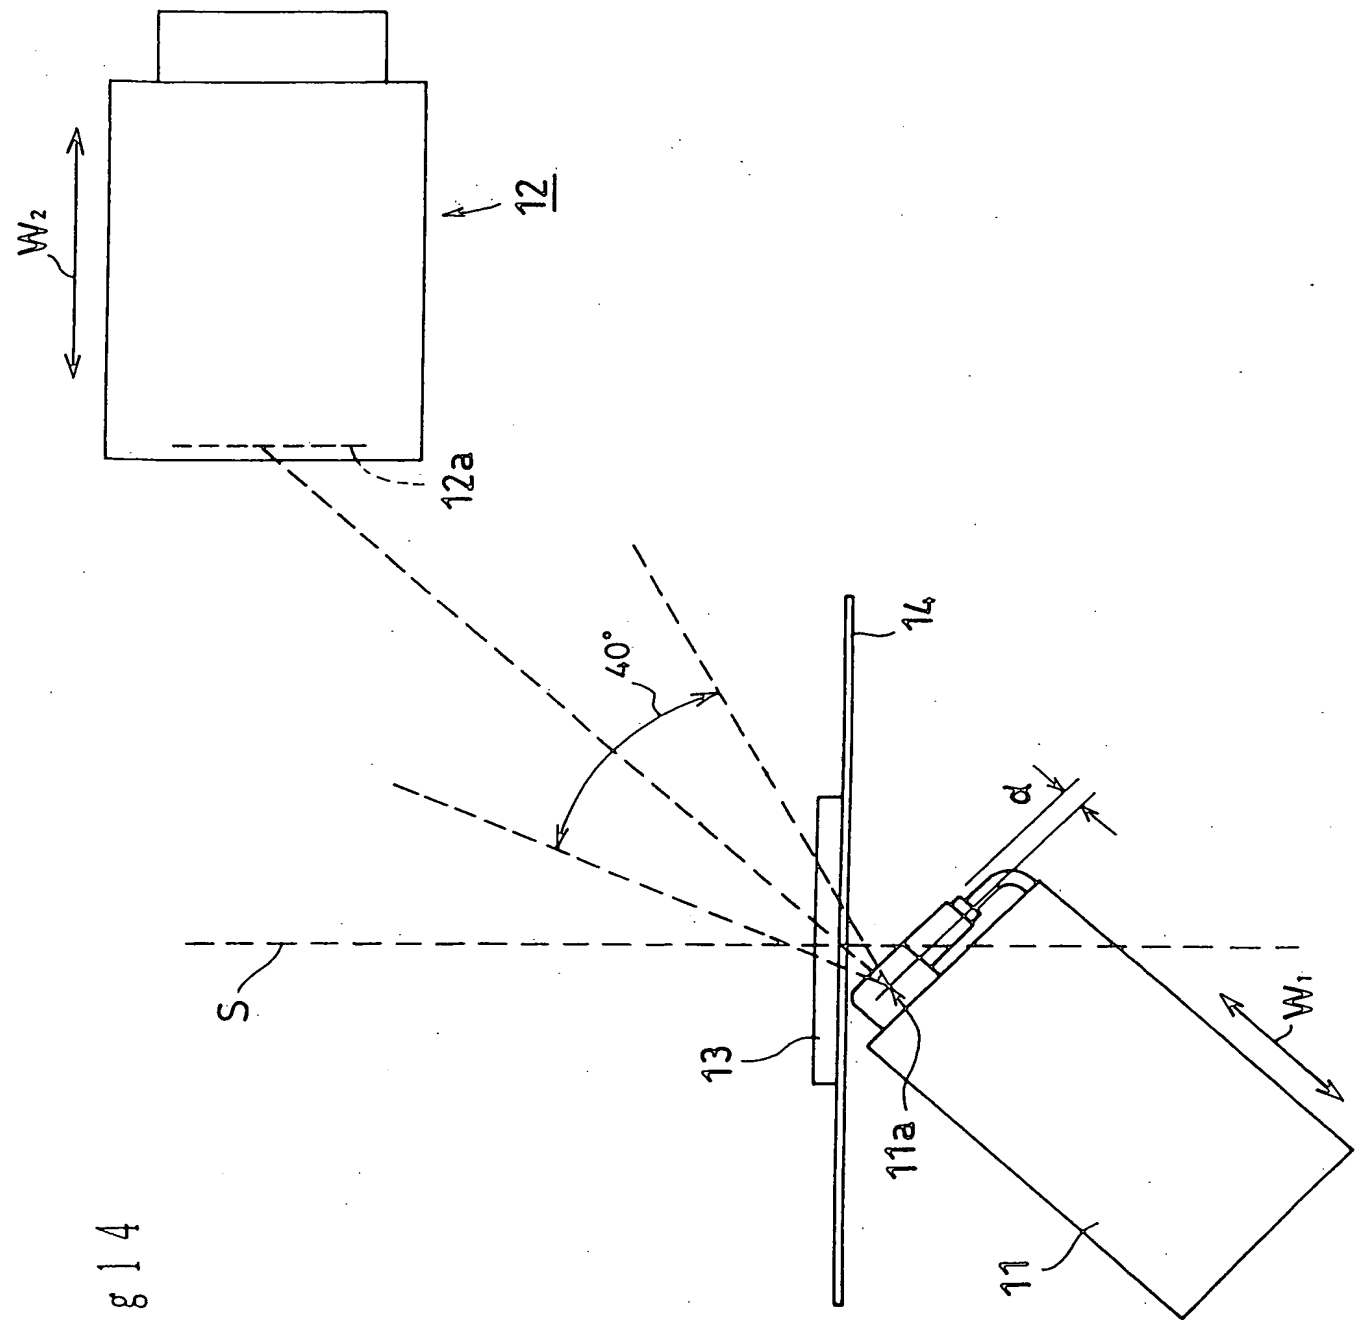

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

F i g 3 (a)

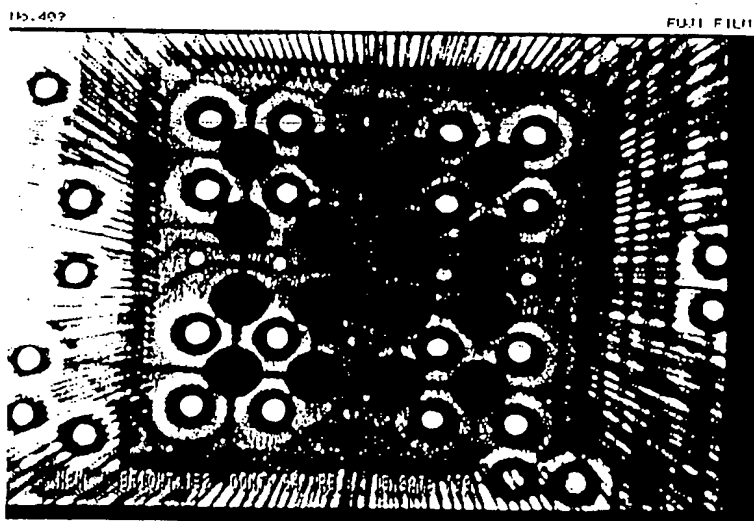


F i g 3 (b)



APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

Fig 4

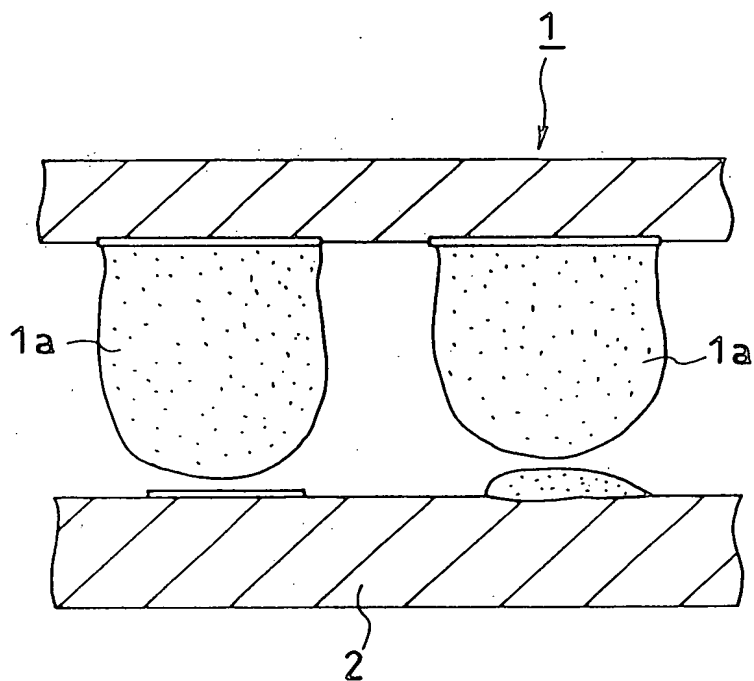

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Fig 5 (a)

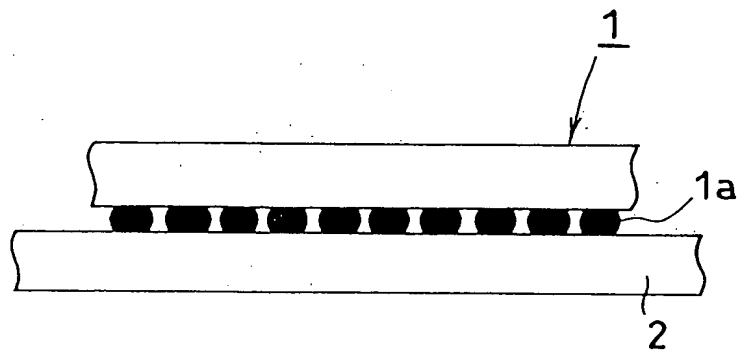


Fig 5 (b)

